



AVR CSB Euroline - series Receiving Hoppers

The practical and multifunctional CSB Euroline receiving hoppers made reputation in the market as extremely reliable. The different possibilities for configuration of this machine and the numerous options, make this the ideal machine for middle to big potato (processing) companies.

■ Bunker

The CSB Euroline receiving hoppers can be built in different configurations. Indentations at entrance and exit are possible to increase the capacity. The hopper is equipped with a soft bunker floor (100% potato-friendly) with increased takeout effect. The bunker floor is driven electro-hydraulically, which has the advantage of a high pull force, also at low speeds.




■ Cleaning unit

The cleaning units of the AVR receiving hoppers have a keen design, they are mounted in a hanging way behind the hopper. This avoids dirt on the frame of the rollers, so the inclination and position are always adjustable. The distance in between the cleaning rollers is hand-hydraulically adjustable. Different types of rollers are available, as is a pre-grading unit.




■ Cross conveyors


Left, right, up, down, forward, backward... the conveyors mounted under the roller unit(s) are adjustable in every direction. In that way an ideal flow to the next machine in the storage line can always be adjusted with minimal drop heights and guaranteed product quality!

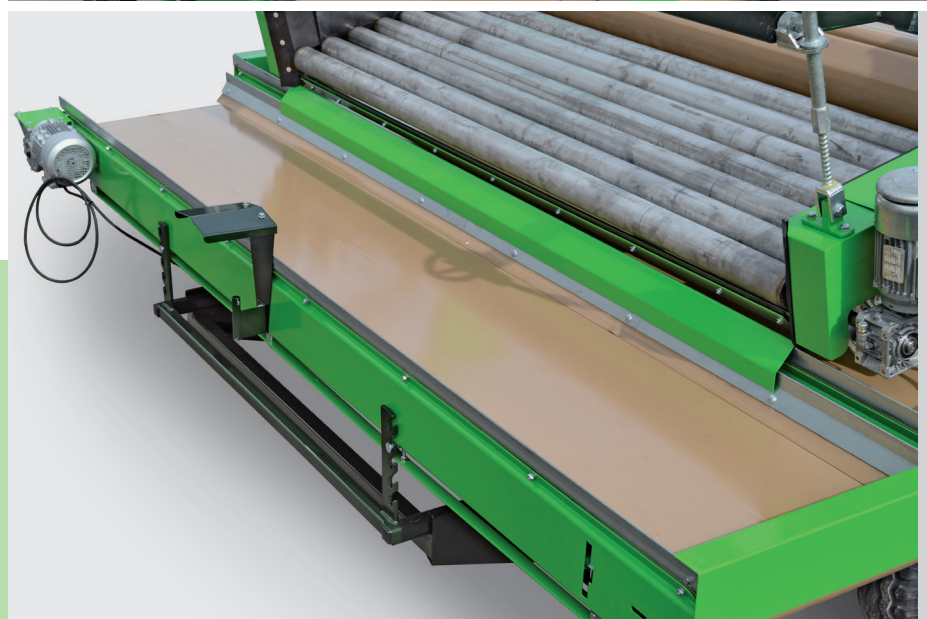


Technical Specifications

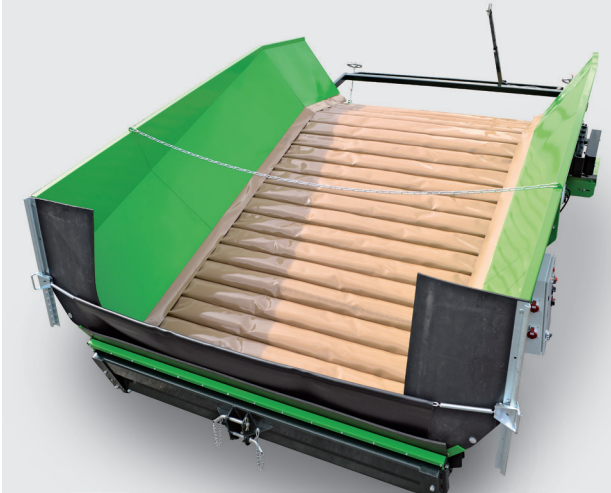


Bunker floor with increased takeout effect

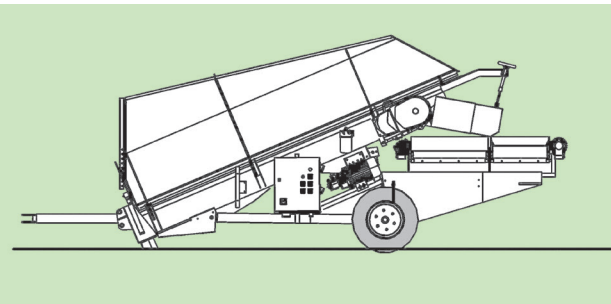


CSB 700/840-E

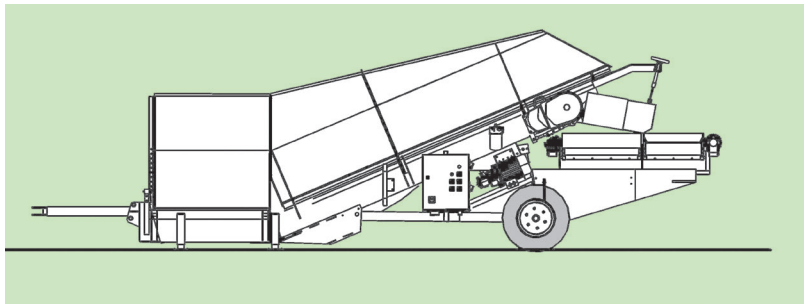

CSB 1050/1200-E

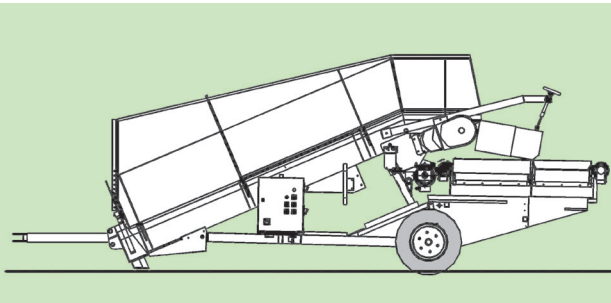

CSB 755/855-E

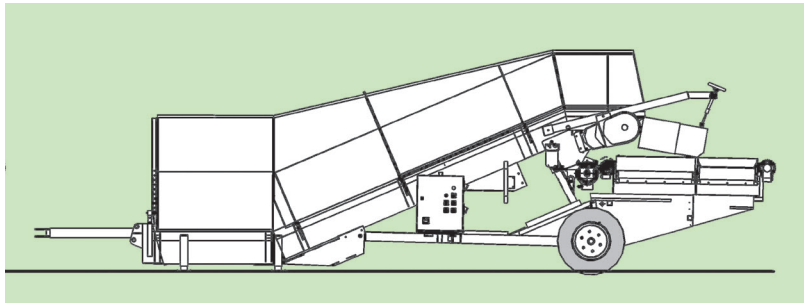

CSB 1455/1655-E

CSB Type:	700	840	755	855	1050	1200	1455	1655
Bottom width (m)	2,00	2,40	2,00	2,40	2,00	2,40	2,00	2,40
Contents (m ³)	10,00	11,00	11,00	12,50	13,00	15,50	14,00	17,00
Bottom lenght (m)	3,50	3,50	4,10	4,10	5,00	5,00	5,60	5,60



AVR Netherlands B.V. | Beneden Dwarsdiep 25
 9645 LA Veendam, The Netherlands
 T +31 (0) 598 666670 | F +31 (0) 598 666676
 info@avr-nl.com | www.avr-nl.com

