

AVR CTHV 70 series Store Loaders

۲

AVR's ingenious telescopic store loaders are characterized by their efficiency and product-friendliness, and are extremely well-suited for swiftly and efficiently unloading different products such as potatoes, onions and grain.

High Stability

Because the main frame and the extendable part consist of only one piece (AVR Monobody frame), the machine has a very high stability.

Running Sidewalls

۲


The drive that is located on top of the frame prevents the belts from slipping, which reduces conveyor belt and roller wear. The conveyor belt is equipped with high flights and is V-shaped along the full length of the machine (running side walls). This results in a high capacity and in productfriendliness; the product remains still and does not come into contact with the frame.

Automatically pivoting

With the CHTV series, swivel bars or swivel plates are now a thing of the past. Users can set the machine's swivel range using the remote control, after which the machine will automatically pivot between the set points. Furthermore, the machine is extremely manoeuvrable thanks to the drive of both main wheels and the 360 degrees rotating casters.






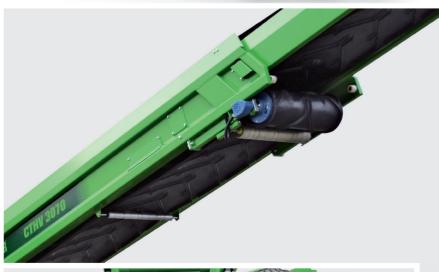



۲

Technical Specifications

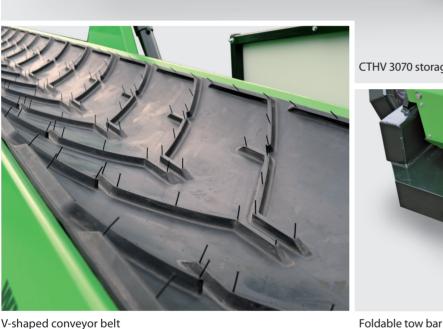

CTHV 3070 storage loader

۲

AVR

CTHV 3070



V-shaped conveyor belt

۲

CTHV 2670 3070 Conveyor width 0.65 m 0.65 m Maximum length 11.00 m 15.00 m 6.85 m Minimum length 8.85 m Max. overhang 8.25 m 11.35 m Feed height 5.90 m 7.40 m Entry height 1.05 m 1.05 m Track width 2.14 m 2.14 m 1 x 4.0 kW 1 x 4.0 kW Conveyor driven by two-speed drum motor Conveyor speed 30/60 m/min 30/60 m/min



AVR Netherlands B.V. | Beneden Dwarsdiep 25 9645 LA Veendam, The Netherlands T +31 (0) 598 666670 | F +31 (0) 598 666676 info@avr-nl.com | www.avr-nl.com



۲